
HITACHI SH7055 MEC38-310 NISSAN

plugin **661**



HITACHI SH7055 MEC38-310 NISSAN

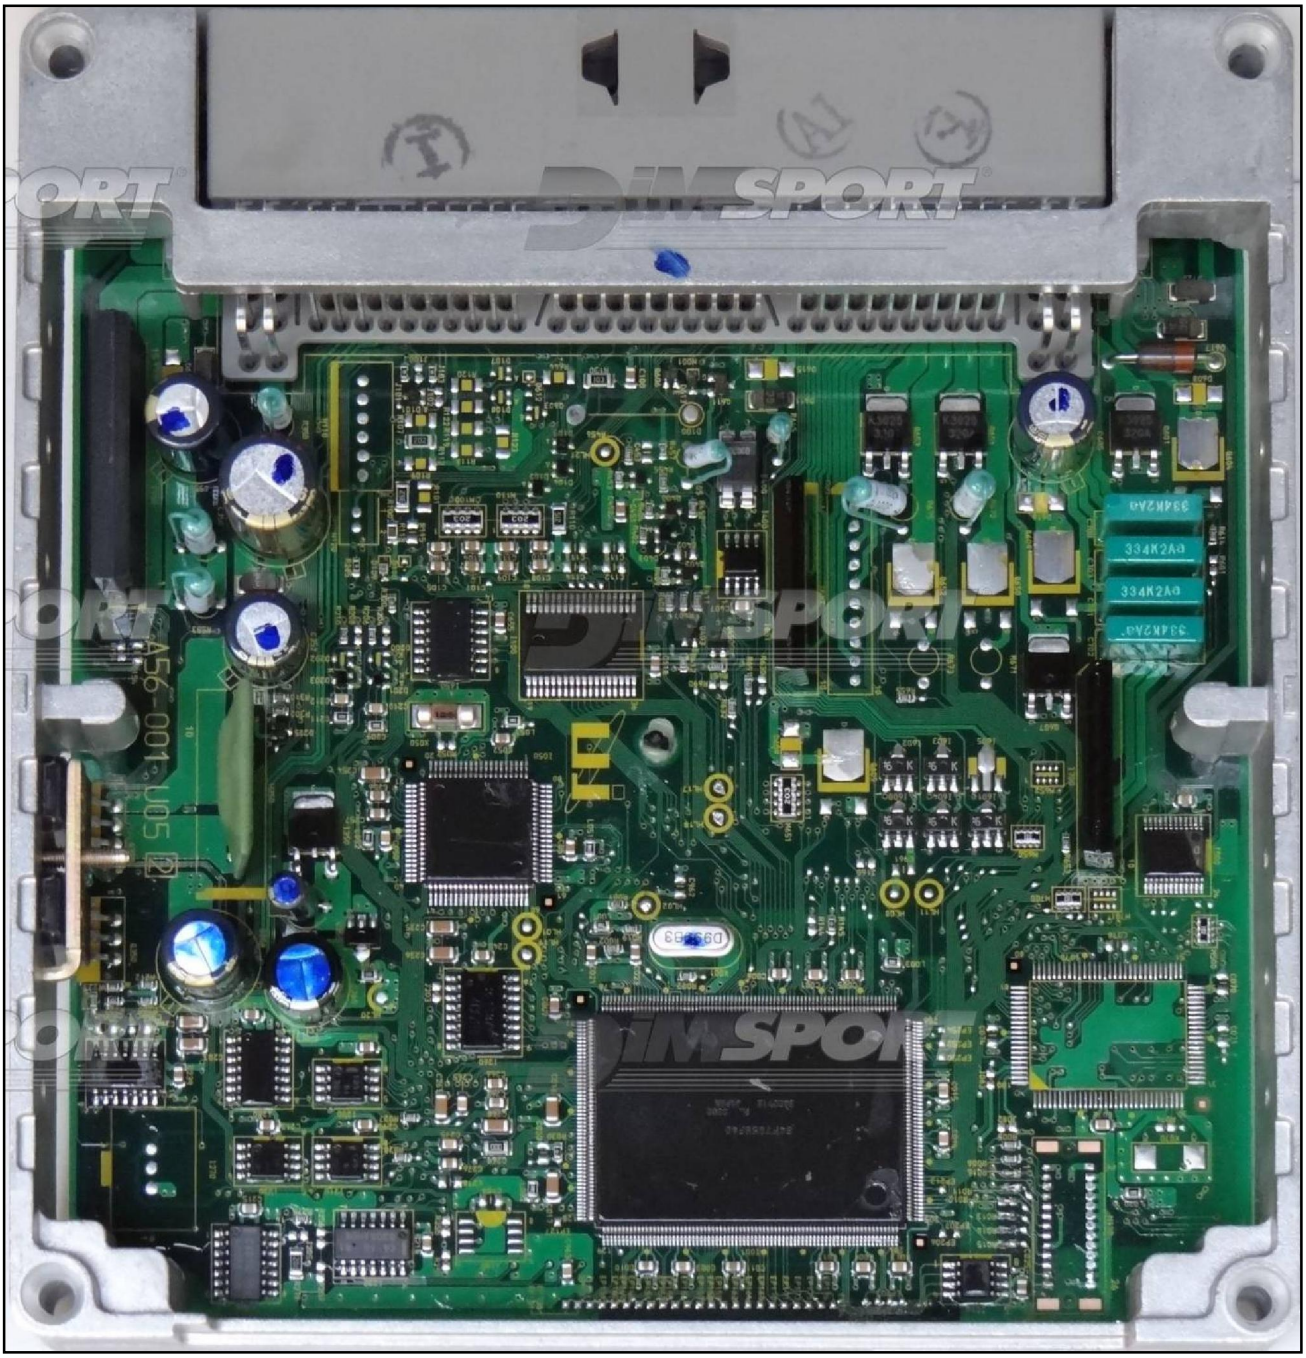


HITACHI SH7055 MEC38-310 NISSAN


DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.
Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION
	ROSSO RED	POSITIVO DIRETTO POWER BATTERY
	ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
	NERO BLACK	MASSA GND
	GIALLO YELLOW	KLINE
	VERDE GREEN	CAN LOW
	BIANCO WHITE	CAN HIGH
	GRIGIO GREY	POL4 BOOT
	BLU BLUE	POL5 CNF1
	VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
	MARRONE BROWN	RESET

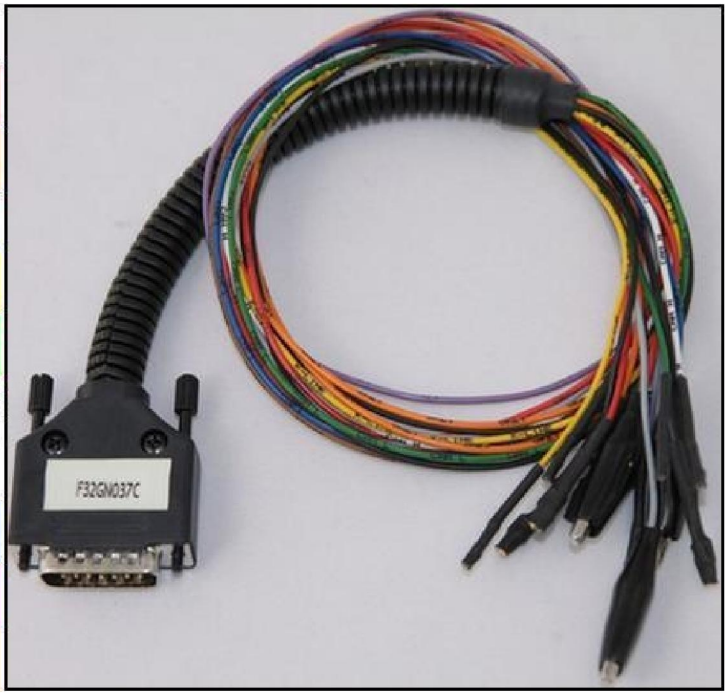


ECU CONNECTOR

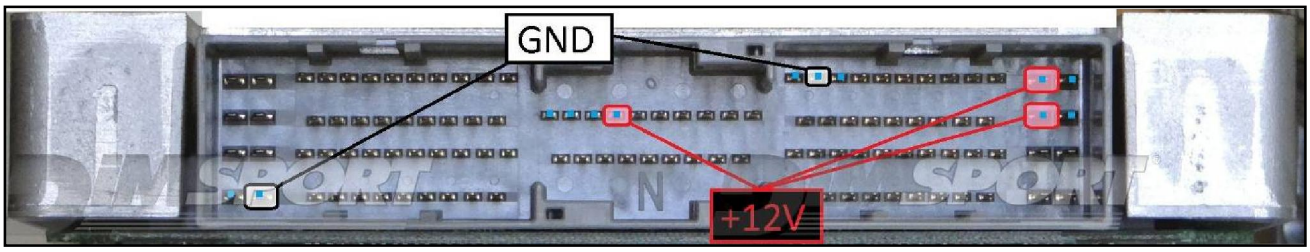

To the power feeding pins +12V you can connect both wires red (VECU) and orange VKEY) of the F32GN037C cable, they both have 12V signal.

HITACHI SH7055 MEC38-310 NISSAN


ECU DIRECT CONNECTION FOR READING & WRITING:
For the READING and WRITING procedure use the FLAT cable F34NTF51

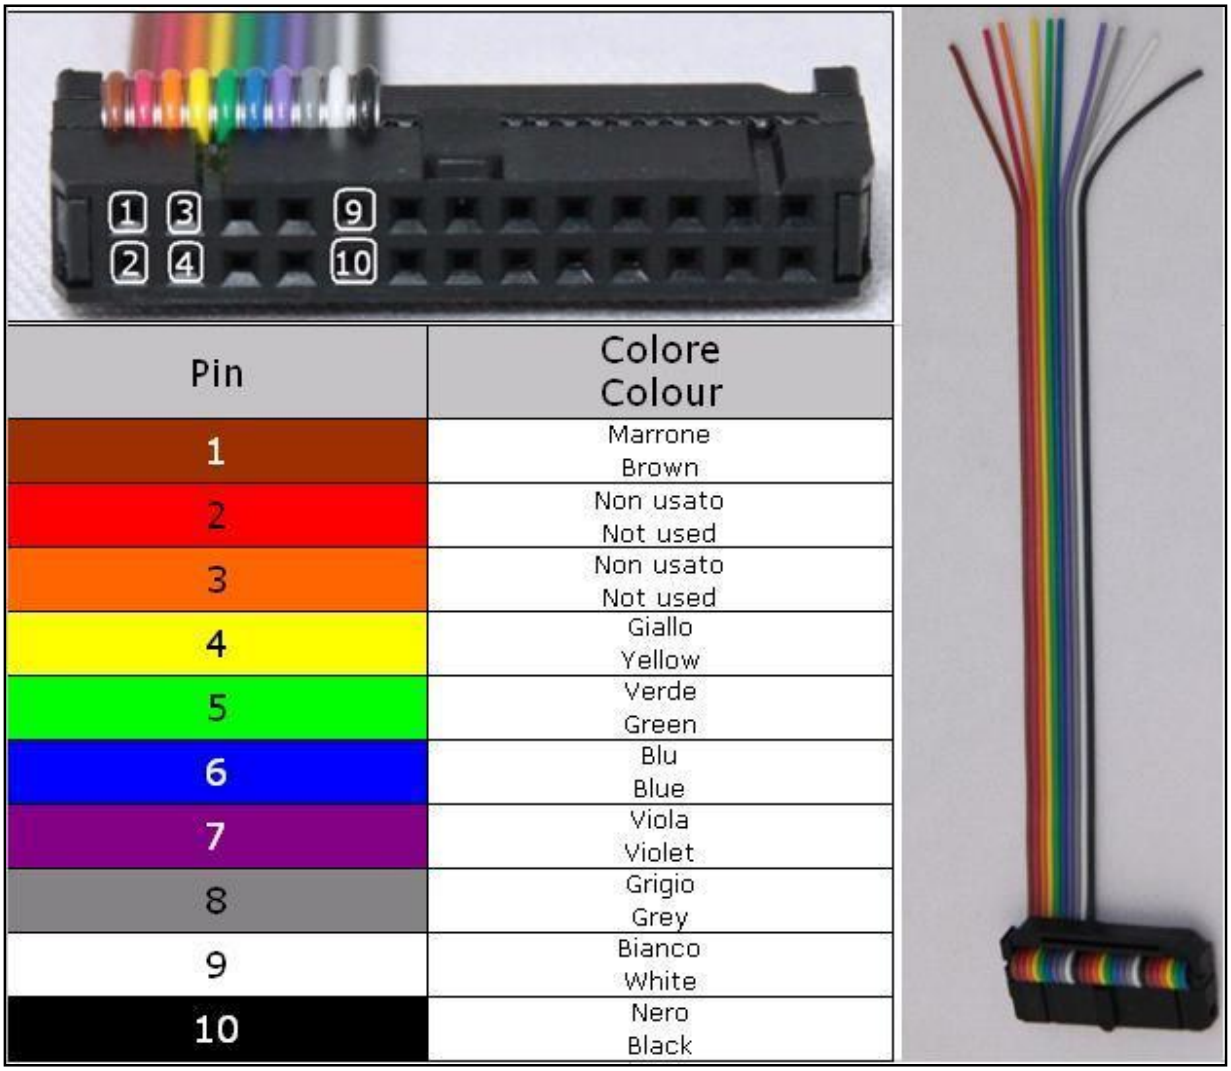

Pin	Colore Colour
1	Marrone Brown
2	Non usato Not used
3	Non usato Not used
4	Giallo Yellow
5	Verde Green
6	Blu Blue
7	Viola Violet
8	Grigio Grey
9	Bianco White
10	Nero Black

HITACHI SH7055 MEC38-310 NISSAN

In order to perform properly the reading and writing operations it is necessary to remove the resistor R450 displayed in the picture here below. Set back the resistor before placing back the ECU into the vehicle.

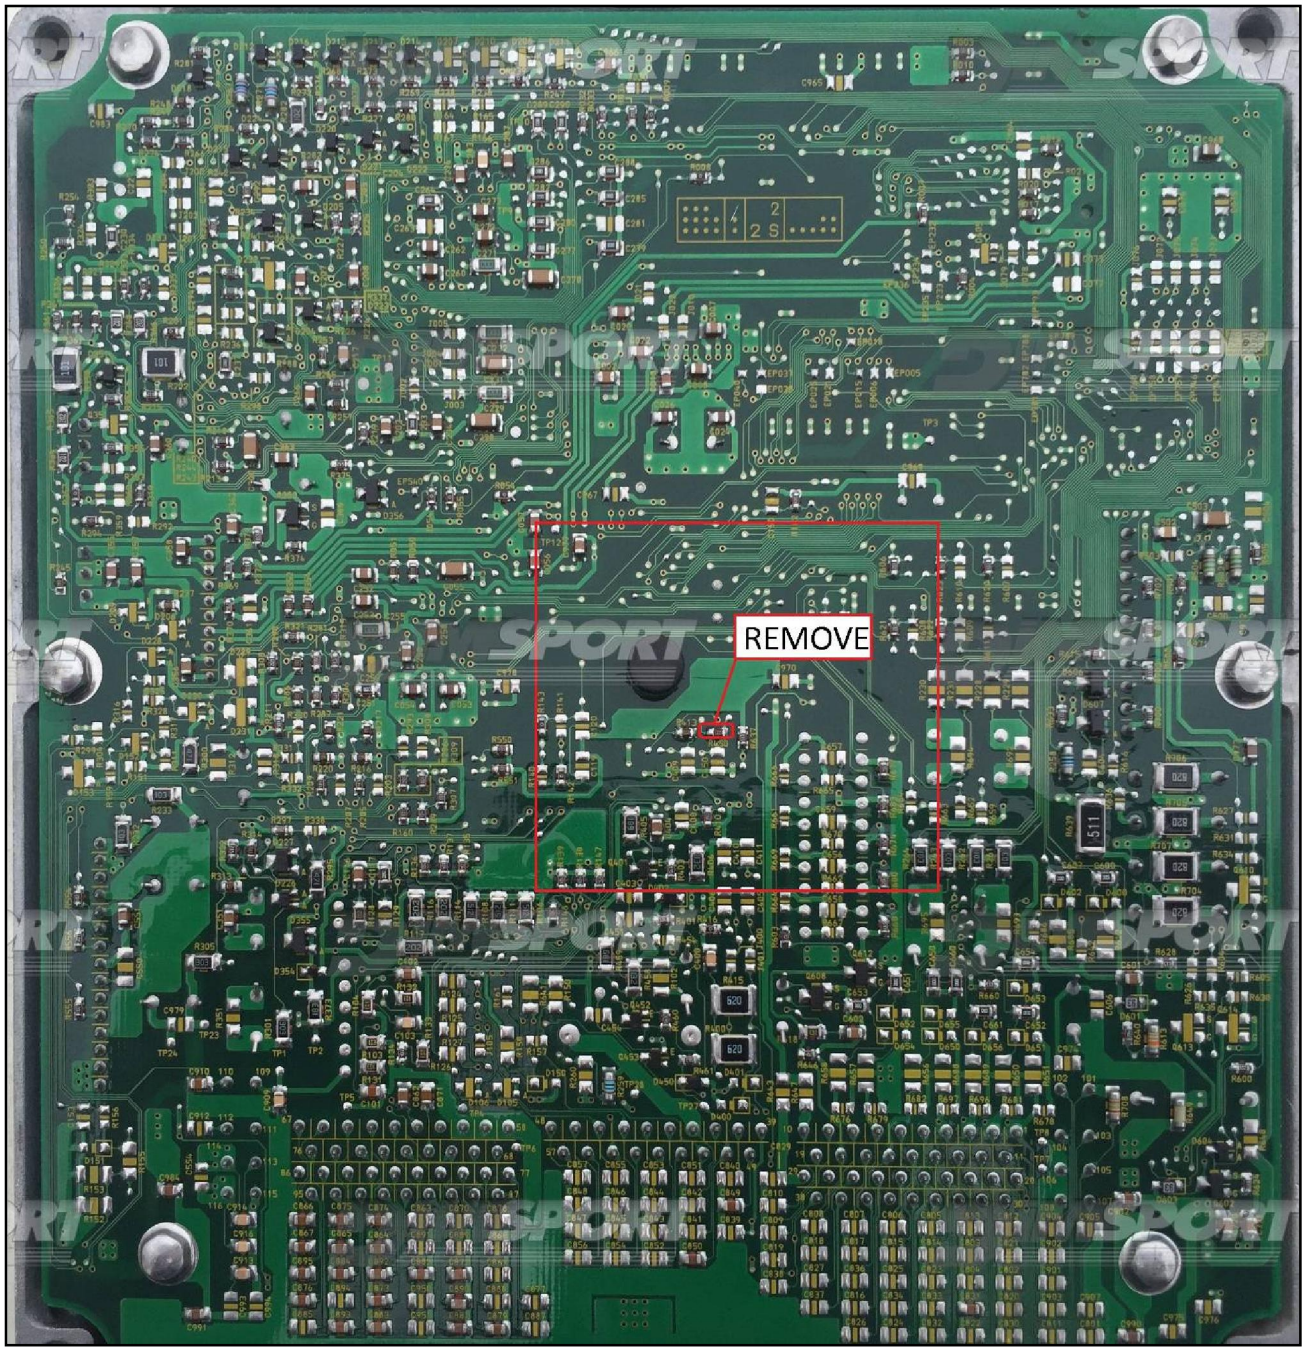

HITACHI SH7055 MEC38-310 NISSAN

